

# SLIMPARK

## IN Entrance Control Terminal

Control terminal for issuing short term parker tickets as well as optionally checking season parker cards SLIM.

- Ticket printing and issuing after pressing the ticket request button
- Printing paper supply for up to 2,000 paper tickets
- Multiple swindling protection: Ticket issuing only after the induction loop has been occupied, message if passage does not occur
- Transaction check: inside/outside-check
- Ticket issuing automatically blocked if the car park is occupied
- Automatic switching free/occupied
- Vehicle counting according to the type of ticket
- Intercom device
- Ethernet connection



Figure with options

### Basic equipment

- Thermal printer for the production of barcode short term parker tickets
- Ergonomic arrangement of the flashing ticket request button combined with ticket issue with rain deflector
- Variable access to the device interior via doors on the left and right-hand side
- Ticket shortage message upon reaching a remaining amount set by the operator

- LCD, 2x20 characters, backlit, glare-free installation
- Terminal Control Computer LCC/SCC with LINUX® operating system, with passive cooling, wear-free storage medium and software application
- Intercom device
- Ethernet connection for communication with the system administration CONTROL
- Thermostatically controlled fan

### Options

- Barcode scanner for processing barcode function cards and season parker cards SLIM
- I/O board for communication with external systems or devices
- Installation of a relay for diverse activations
- Thermostatically regulated heater
- EasyMove for hands-free entrance control, range with active EasyMove card up to 8cm

# IN

## Entrance Control Terminal

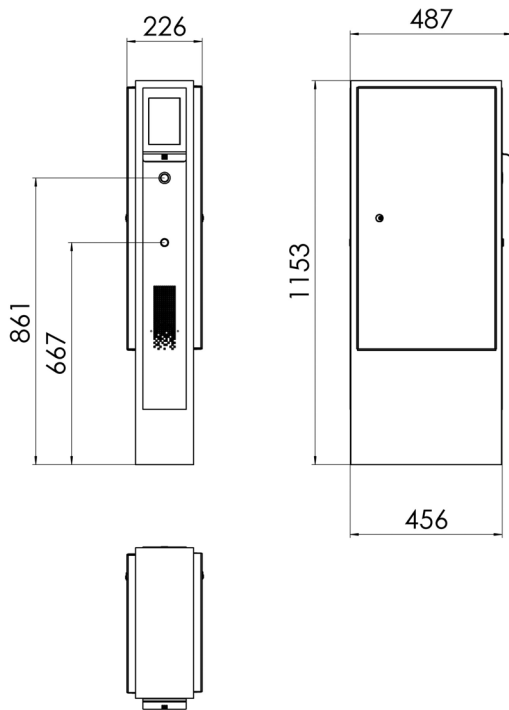


Figure with options

### Design

- Casing, side doors and front panel of aluminium, outer and inner surface with durable, weather-resistant powder coating
- Locking side doors secured with a cylinder lock
- Casing: RAL 9006 (aluminium white)
- Side doors: RAL 7012 (basalt grey)
- Front panel: RAL 7012 (basalt grey)
- Also available as casing without devices (EMPTY)

### Technical data

- Voltage supply: 230V AC, 50Hz
- Current consumption:
  - device: operation 0.13A, max. 0.45A
  - heater: 1.1A
- Power consumption:
  - device: operation 30W, max. 100W
  - heater: 250W
- Network system: TN-S system
- Pre-fuse: max. 16A
- Terminal cross-section: max. 2.5<sup>2</sup>
- Connection type: tension spring connection
- Protection class: I
- Control voltage: 24V DC
- Rating: IP 54
- Temperature:
  - operation: +10 to +50 °C
  - with heater: -20 to +50 °C
  - storage: -25 to +70 °C
- Weight: approx. 30kg
- Dimensions: see figure

### contact

DESIGNA  
Verkehrsleittechnik GmbH  
Faluner Weg 3  
24109 Kiel/Germany

Tel. +49 431 5336-0  
Fax +49 431 5336-260  
info@designa.com  
designa.com